
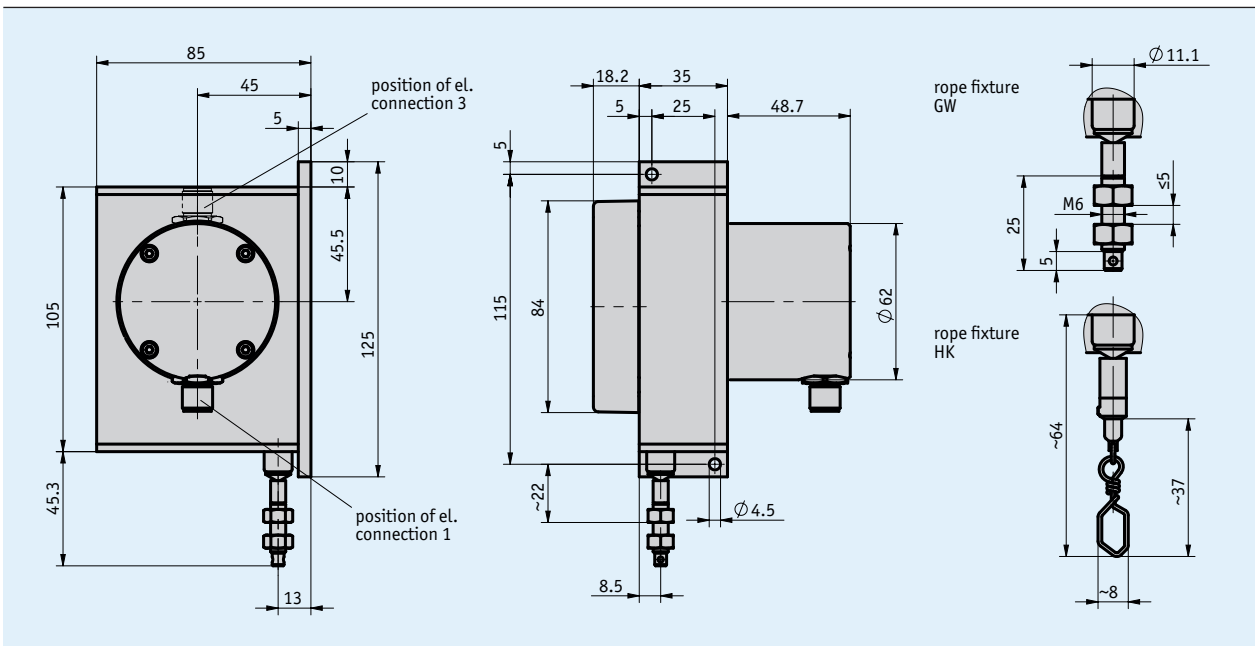


Profile

- Robust design
- Measuring lengths up to 6000 mm
- Analogue signal output in redundant design (2x 4...20 mA or potentiometer)
- Very robust measuring rope (stainless steel)
- IP65 protection class
- M12 plug connection

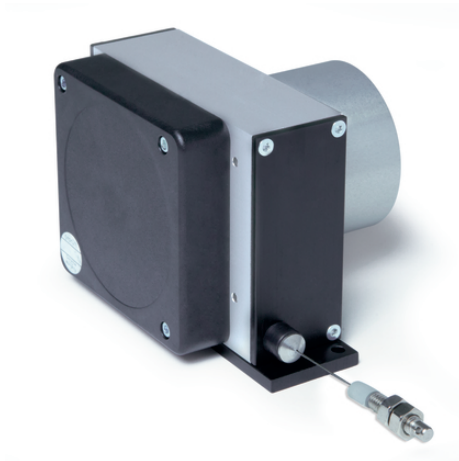

Mechanical data

Feature	Technical data	Additional information
Housing	aluminum/plastics	
Wire design	$\varnothing 0.54$ mm	rustproof stainless steel
Extension force	≥ 8 N on the rope	
Measured distance/ rope drum revolution	200 mm	
Weight	~ 0.8 kg	

Electrical data

Encoder potentiometer

Feature	Technical data	Additional information
Operating voltage	≤30 V DC	power dissipation on potentiometer <1 W
Power rating	2 W at 70 °C	
Resistance	10 kΩ	
Resistance tolerance	±5 %	
Standard terminal resistance	0.5 % or 1 Ω	the higher value always applies
Linearity tolerance	±0.25 %	
Type of connection	M12 plug connector (A-coded)	8-pole, 1x pin

Transducer, power output

Feature	Technical data	Additional information
Operating voltage	10 ... 30 V DC	with load impedance ≤500 Ω voltage between I+ and I-
Output current	4 ... 20 mA (2x)	4/20mA 4/20mA
	20 ... 4 mA (2x)	20/4mA 20/4mA
	4 ... 20 mA, 20 ... 4 mA	4/20mA 20/4mA
Type of connection	M12 plug connector (A-coded)	8-pole, 1x pin

* Measurement transducers permit optimum adjustment of the output current and output voltage to the measuring range. The measurement transducer is pre-set at the works so that an output signal of 4 ... 20 mA or 20 ... 4 mA is available.

System data

Feature	Technical data	Additional information
Repeat accuracy	±0.25 mm	per starting direction
Measuring range	5000 mm , 6000 mm	
Travel speed	≤800 mm/s	
Failure rate	166.7 year(s)	at 60 °C (MTBF)

Ambient conditions

Feature	Technical data	Additional information
Ambient temperature	-40 ... 80 °C	
Relative humidity	condensation inadmissible	
EMC	EN 61000-6-2	interference resistance / immission
	EN 61000-6-4	emitted interference / emission
Protection category	IP65 (for electronic unit)	EN 60529, certonal-coated electronic unit



Pin assignment

■ Potentiometer pin assignment

Signal	PIN	Additional information
Po	1	Potentiometer 1
Po	2	Potentiometer 2
S	3	Potentiometer 2
Pe	4	Potentiometer 2
nc	5	
Pe	6	Potentiometer 1
S	7	Potentiometer 1
nc	8	


■ Transducer pin assignment

Signal	Pin	Additional information
I+	1	Transducer 1
I+	2	Transducer 2
nc	3	
I-	4	Transducer 2
nc	5	
I-	6	Transducer 1
nc	7	
nc	8	

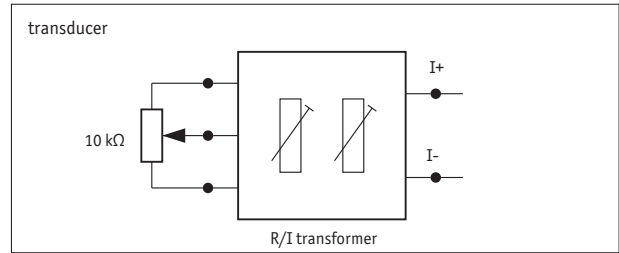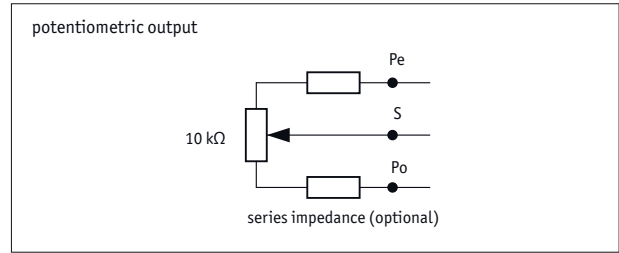

Hint for mounting

When securing the wire it must be ensured that the wire is straight and vertical in relation to the wire outlet.
 Recommendation: Only select the starting position after an unwound length of approx. 5 mm. This prevents the wire hitting the end stop when it is rewound.

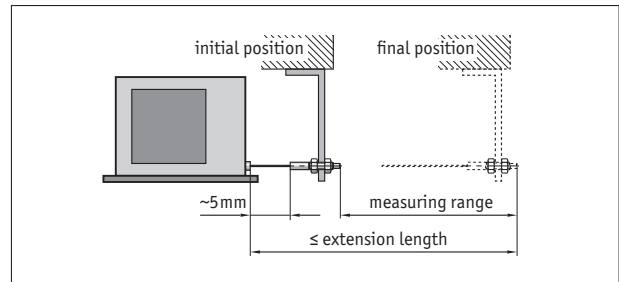

Symbolic representation

Order

Ordering table

Feature	Ordering data	Specification	Additional information
Measuring range	... A	5000, 6000 in mm	
Rope fixture	GW	wire suspension with thread	
	HK	wire suspension with hook	
Encoder type	P10_P10	2x potentiometer 10 kΩ	
	4/20mA_4/20mA	2x transducer 4...20 mA	
	20/4mA_20/4mA	2x transducer 4...20 mA	
	4/20mA_20/4mA	2x transducer 4...20 mA, counter-rotating	
Position of electrical connection	1	direction of wire outlet	
	3	opposite the wire outlet	
Series impedance	0	0 Ω	
	1k2	1.2 kΩ	

Order key



Scope of delivery: SG62, Mounting instructions

Accessories:

Electronic display MA50

Guide roller UR

Wire extension piece SV

www.siko-global.com

www.siko-global.com

www.siko-global.com